

CJ6-1.3 (6V1.3AH)

Specification

Nominal Voltage	6V		
Nominal Capacity(20HR)	1.3AH		
Dimension	Length	97 ± 1mm	(3.82 inches)
	Width	24 ± 1mm	(0.94 inches)
	Container Height	51.5 ± 1mm	(2.03 inches)
	Total Height (with Terminal)	57.5 ± 1mm	(2.26 inches)
Approx Weight	Approx 0.28 kg (0.62lbs)		
Terminal	T1		
Container Material	ABS		
Rated Capacity	1.30 AH/0.065A	(20hr , 1.80V/cell,25°C/77°F)	
	1.21 AH/0.121A	(10hr, 1.80V/cell,25°C/77°F)	
	1.11 AH/0.221A	(5hr, 1.75V/cell,25°C/77°F)	
	0.994 AH/0.331A	(3hr, 1.75V/cell,25°C/77°F)	
	0.816 AH/0.816A	(1hr, 1.60V/cell,25°C/77°F)	
Max. Discharge Current	19.5A (5s)		
Internal Resistance	Approx 65mΩ		
Operating Temp.Range	Discharge : -15~50°C (5~120°F)		
	Charge : 0~40°C (5~104°F)		
	Storage : -15~40°C (5~104°F)		
Nominal Operating Temp. Range	25±3°C (77±5°F)		
Cycle Use	Initial Charging Current less than0.39A.Voltage		
	7.2V~7.5V at 25°C(77°F)Temp. Coefficient -15mV/°C		
Standby Use	No limit on Initial Charging Current Voltage		
	6.75V~6.9V at 25°C(77°F)Temp. Coefficient -10mV/°C		
Capacity affected by Temperature	40°C (104°F)	103%	
	25°C (77°F)	100%	
	0°C (32°F)	86%	
Self Discharge	CJ series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.		



Applications

- ◆ All purpose
- ◆ Uninterruptable Power Supply (UPS)
- ◆ Electric Power System (EPS)
- ◆ Emergency backup power supply
- ◆ Emergency light
- ◆ Railway signal
- ◆ Aircraft signal
- ◆ Alarm and security system
- ◆ Electronic apparatus and equipment
- ◆ Communication power supply
- ◆ DC power supply
- ◆ Auto control system

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	2.48	1.90	1.57	1.36	1.05	0.776	0.654	0.387	0.303	0.246	0.201	0.174	0.140	0.117	0.064
1.80V/cell	3.32	2.43	1.90	1.61	1.24	0.902	0.732	0.422	0.326	0.263	0.215	0.187	0.149	0.121	0.065
1.75V/cell	3.75	2.67	2.08	1.73	1.29	0.936	0.766	0.438	0.332	0.268	0.221	0.192	0.151	0.124	0.066
1.70V/cell	4.13	2.91	2.22	1.82	1.34	0.973	0.790	0.449	0.341	0.276	0.227	0.196	0.154	0.127	0.067
1.65V/cell	4.55	3.14	2.36	1.93	1.42	0.998	0.809	0.455	0.355	0.285	0.233	0.200	0.156	0.129	0.068
1.60V/cell	5.02	3.41	2.52	2.06	1.50	1.040	0.816	0.475	0.366	0.294	0.241	0.204	0.158	0.131	0.068




Constant Power Discharge (Watts) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	4.53	3.51	2.94	2.57	2.01	1.49	1.26	0.751	0.590	0.481	0.393	0.342	0.277	0.232	0.127
1.80V/cell	6.01	4.43	3.50	2.99	2.33	1.72	1.40	0.814	0.631	0.511	0.420	0.366	0.293	0.239	0.129
1.75V/cell	6.63	4.79	3.78	3.19	2.40	1.77	1.46	0.841	0.640	0.520	0.430	0.374	0.297	0.245	0.130
1.70V/cell	7.10	5.11	3.98	3.32	2.48	1.83	1.50	0.860	0.657	0.533	0.440	0.382	0.301	0.250	0.132
1.65V/cell	7.72	5.46	4.20	3.50	2.60	1.86	1.53	0.868	0.682	0.549	0.450	0.389	0.305	0.254	0.134
1.60V/cell	8.32	5.79	4.42	3.69	2.73	1.93	1.53	0.900	0.699	0.565	0.464	0.396	0.308	0.257	0.134


Dimensions

T1 Terminal


Unit: mm [inches]

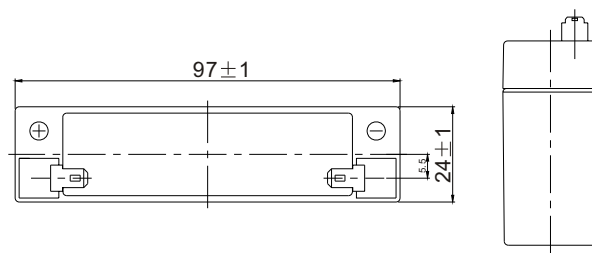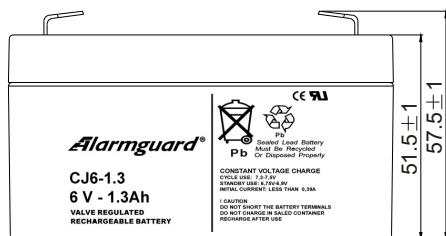


Discharge Characteristics

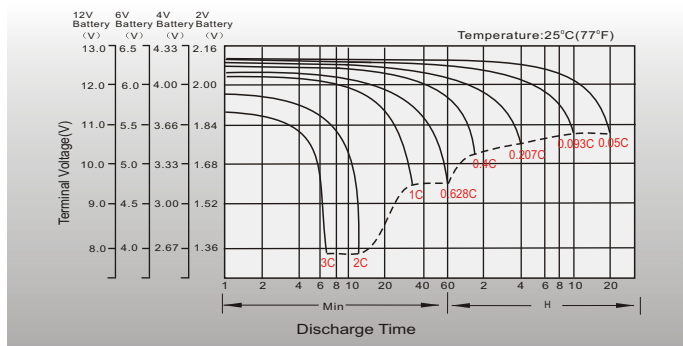


Float Charging Characteristics

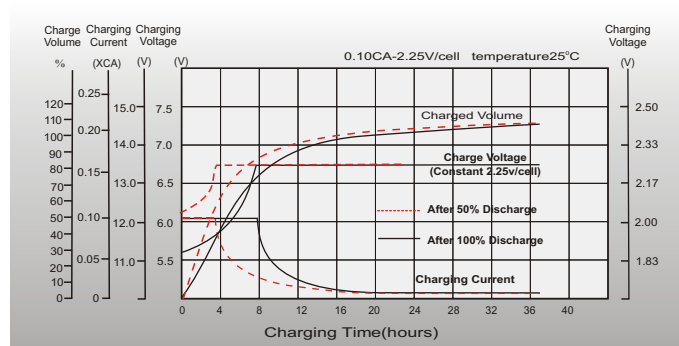


Temperature Effects in Relation to Batter Capacity

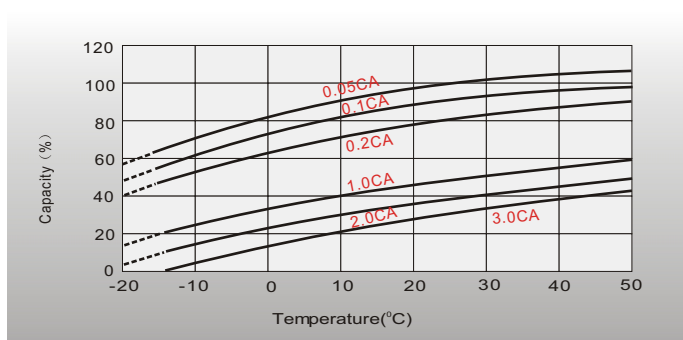

Effect of Temperature on Long Term Float Life

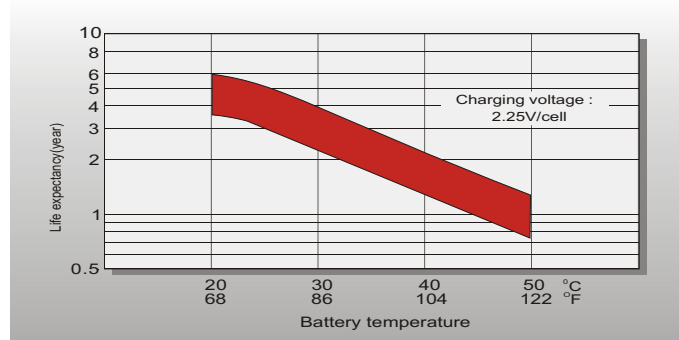

Cycle Life in Relation to Depth of Discharge

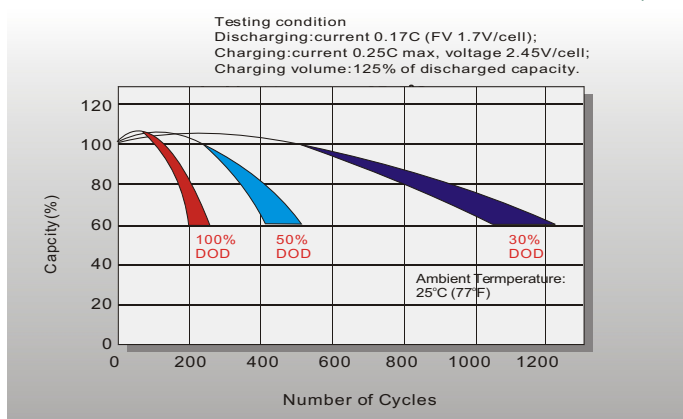

Self Discharge Characteristics

