



GPL Series

GPL121000S Datasheet

12V Top Terminal VRLA-AGM

Specifications

Voltage (Vdc)	12
Nominal Capacity (1.75 VPC @ 25°C)	100 Ah @ 20hr-rate
Ah Capacity (8-Hr 1.75 VPC @ 25°C)	90.9
Ah Capacity (20-Hr 1.75 VPC @ 25°C)	100
Ah Capacity (8-Hr 1.80 VPC @ 25°C)	89.2
Max Charge Current (A)	30.0
Max Discharge Current (A)	800(5sec)
Short Circuit Current (A)	2171
Internal Resistance	Approx. 4.4 mΩ
Terminal Type	12 thread lead alloy terminal to accept M6 bolt
Terminal Torque	51.7±10.3 Kgf·cm / 44.9±9.0 Lbf·in / 5.10±1.0 N·m
Container Material	PP (UL 94-HB) & Flame Retardant (94-V0) available upon request
Weight (kg. / lb., Approx.)	29.3 / 64.6
Length (L) (mm / in)	308.7±2.5 / 12.15±0.10
Width (W) (mm / in)	169.0±2.0 / 6.65±0.08
Height (H) (mm / in)	213.6±2.5 / 8.41±0.10
Design Life	Up to 10 Years in Standby Service at 25°C Eurobat (20°C): >12 Years Very Long Life
Operating Temperature	Nominal: 25°C (77°F) Discharge: -15°C - 50°C (5°F-122°F) Charge/Storage: -15°C - 40°C (5°F - 104°F)
Float Charging Voltage	13.5 - 13.8 Vdc/battery 25°C (77°F)
Eq. Charging Voltage	14.4 - 15.0 Vdc/battery 25°C (77°F)
Self-Discharge	Less than 10% after 90 days, can be stored up to 6 months and 10 months with equalization charge* at 25C (77F); Full recharging is required before usage, and charged sooner if stored at higher temperature than 25C (77F).



Made in Vietnam

Valve Regulated Lead Acid
(VRLA) Battery

Maintenance-Free, Absorbent
Glass Mat (AGM) Technology for
Efficient Gas Recombination of
up to 99%

Pure Lead Construction and
Proprietary Elements

Designed for Float Service
Standby Power Applications

Built in Accordance with IEC
60896-21/22:2004 and UL1989
Recognized (MH14533)





GPL Series

GPL121000S Datasheet


12V Top Terminal VRLA-AGM

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	60MIN	90MIN	2HR	3HR	5HR	8HR	10HR	20HR
10.02V (1.67 VPC)	311	222	183	113	66.9	48.2	37.9	26.9	17.3	11.5	9.48	5.03
10.50V (1.75 VPC)	246	196	171	106	65.2	47.4	37.3	26.6	17.1	11.4	9.36	4.97
10.80V (1.80 VPC)	202	179	155	99.1	63.2	46.1	36.3	26.0	16.7	11.1	9.18	4.89


Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	60MIN	90MIN	2HR	3HR	5HR	8HR	10HR	20HR
10.02V (1.67 VPC)	3,250	2,395	2,003	1,253	756	562	445	316	204	136	112	59.8
10.50V (1.75 VPC)	2,749	2,183	1,908	1,189	734	554	440	313	201	134	111	59.2
10.80V (1.80 VPC)	2,387	2,029	1,764	1,118	709	543	431	307	198	132	109	58.3

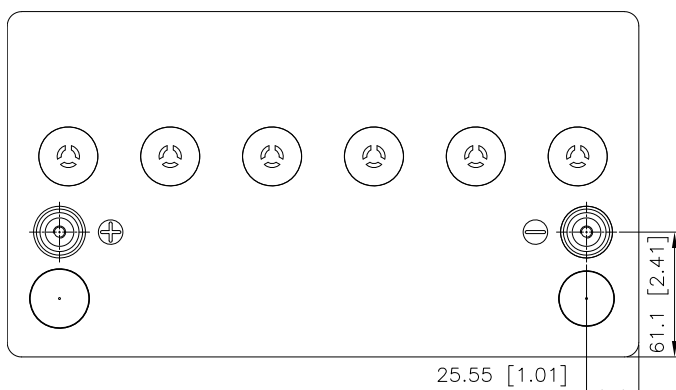

Detail A Drawing(3:1)

I2

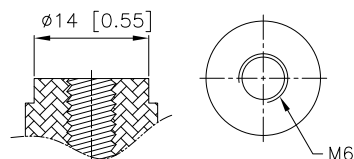

[M6 bolt]

