



HRL Series

HRL1234WF2FR Datasheet

12V Top Terminal VRLA-AGM

Specifications

Voltage (Vdc)	12V
Watts Per Cell (30-Sec to 1.67VPC @25°C)	--
Watts Per Cell (5-Min to 1.67VPC @25°C)	75.34
Watts Per Cell (15-Min to 1.67VPC @25°C)	35.50
Max Charge Current (A)	3.40
Max Discharge Current (A)	130
Short Circuit Current (A)	367
Internal Resistance (mΩ)	Approx. 17.0
Terminal Type	F2 terminal - Faston Tab .250
Terminal Torque	--
Container Material	ABS Flame Retardant (94-V0)
Weight (kg. / lb.)	Approx. 2.70kg / 5.95lb
Length (L) (mm / in)	150.9 ± 2.0mm / 5.94 ± 0.08in
Width (W) (mm / in)	64.8 ± 1.0mm / 2.55 ± 0.04in
Height (H) (mm / in)	98.6 ± 1.0mm / 3.88 ± 0.04in
Design Life	Up to 8 Years in Standby Service at 25°C. Eurobat (20°C): 10/12 Years Long Life
Operating Temperature	Nominal: 25°C (77°F) Discharge: -15°C - 50°C (5°F - 122°F) Charge / Storage -15°C - 40°C (5°F - 104°F)
Float Charging Voltage	13.5 - 13.8 Vdc/battery @ 25°C (77°F)
Eq. Charging Voltage	14.4 - 15.0 Vdc/battery @ 25°C (77°F)
Self-Discharge	Less than 10% after 90 days, can be stored up to 6 months @ 25°C (77°F). Full recharge required before use. Charge sooner if stored above 25°C (77°F).



KEY FEATURES

- Valve Regulated Lead Acid (VRLA) Battery
- Maintenance-Free, Absorbent Glass Mat (AGM) Technology for Efficient Gas Recombination of up to 99%
- Pure Lead Construction and Proprietary Elements

APPLICATIONS

- Designed for High-Rate UPS and Float Service Standby Power Applications

SAFETY & COMPLIANCE

- Built in Accordance with IEC 61056-1/2:2012
- UL1973 Listed (MH66728)
- UL1989 Recognized (MH14533)
- Certified by TUV NORD according to ISO 9001:2015





HRL Series

HRL1234WF2FR Datasheet

12V Top Terminal VRLA-AGM


Constant Current Discharge Characteristics Per Battery: Amperes (25°C / 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
10.02V (1.67VPC)	69.6	48.0	41.7	36.9	30.2	25.6	18.6	14.7	10.60	7.56	5.95	4.25
10.50V (1.75VPC)	60.0	43.6	38.5	34.6	28.7	24.6	18.2	14.4	10.40	7.48	5.90	4.22
10.80V (1.80VPC)	53.2	39.8	35.5	32.3	27.0	23.4	17.5	14.0	10.19	7.32	5.79	4.16

Constant Power Discharge Characteristics Per Battery: Watts (25°C / 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
10.02V (1.67VPC)	699	514	452	404	334	287	213	170	124	89.2	70.7	51.0
10.50V (1.75VPC)	639	477	424	383	321	278	209	167	122	88.3	70.2	50.7
10.80V (1.80VPC)	582	441	397	359	306	266	203	163	120	86.8	69.1	50.1

Line Drawing

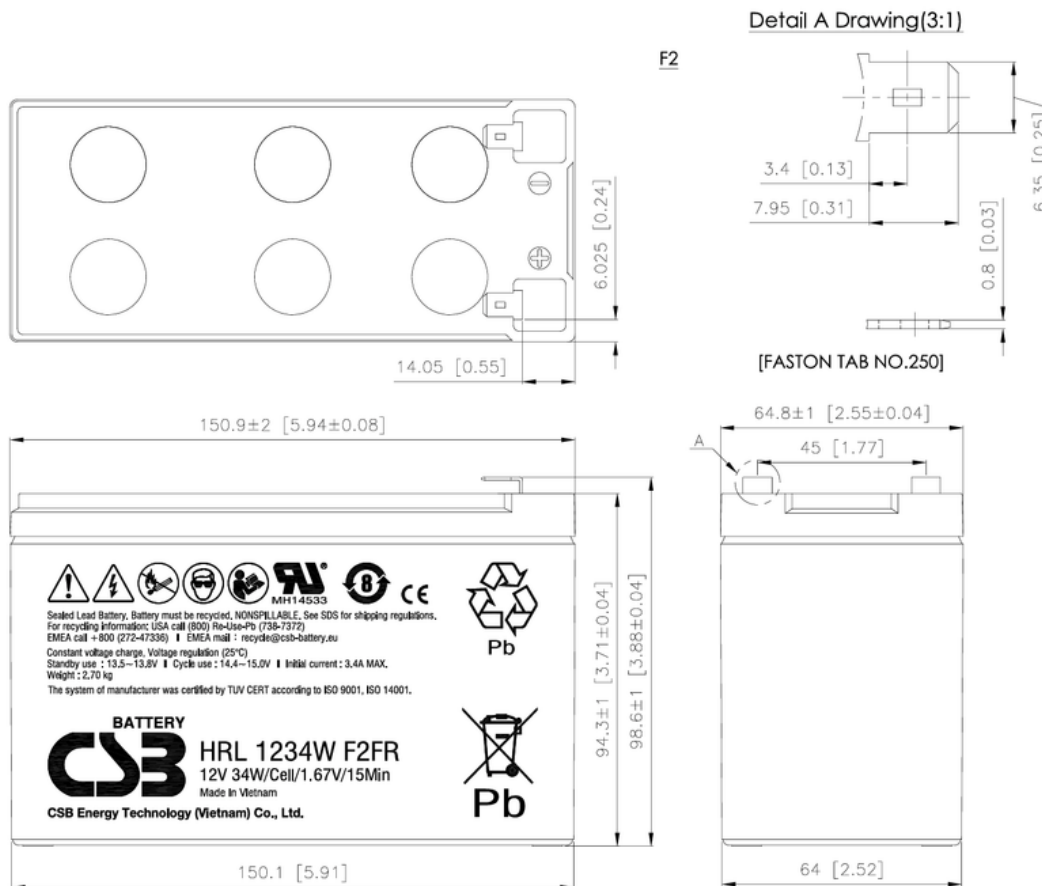

© 2026 CSB Energy Technology Co., Ltd. All Rights Reserved.

CSB Energy Technology Co., Ltd. reserves the right to change specifications or design without notice. Visit csb-battery.com for the latest information.