



## Yuasa Technisches Datenblatt

### Yuasa YBX5075 - YBX5000 Silver High Performance SMF Batterien

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Leistung

Spannung 12V  
 Kapazität 20 Std (vorgegeben) 60Ah  
 Kaltstartstrom (A) EN1 640A

#### Abmessungen

Länge 243mm  
 Breite 175mm  
 Höhe 175mm

#### Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure 14.7kg



#### Gehäuseeigenschaften

Gehäusotyp LB2 DIN  
 Batteriehalter B13/B14  
 Ladezustandsanzeige ✓  
 Tragegriffe ✓  
 Entgasung ✓  
 Deckeltyp SMF doppelwandige Deckelkonstruktion


#### Technologie

Flammschutz ✓  
 Technologie Ca/Ca  
 Adskiller PE  
 VDA Überschlagentest ✓  
 Empfohlener Ladestrom 4A  
 Performance Marking W4-C2-V3-E1

#### Anschlusspol Typ

##### T1


Standard DIN Post

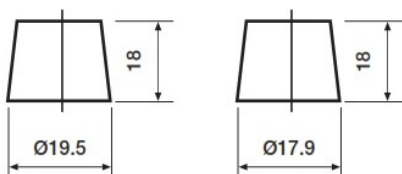

Positive Terminal

Negative Terminal


#### Zellenanordnung

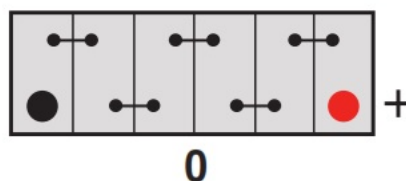

0

#### Batteriehalter

B3/B4 (B3 with Hold-Down adaptor)

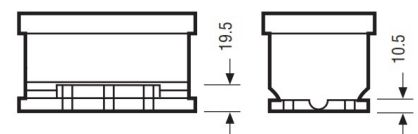

Datenblatt erstellt am 29/06/2023 - E&EO



## Yuasa Technical Data Sheet

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

### Yuasa YBX5075 - YBX5000 Silver High Performance SMF Batteries

#### Performance

Voltage	12V
Capacity (20-hour)	60Ah
Cold Cranking Amps (EN1)	640A

#### Dimensions

Length	243mm
Width	175mm
Height	175mm

#### Weights & Measures

Mean Weight with Acid	14.7kg
-----------------------	--------



#### Container Features

Case Type	LB2 DIN
Hold Down	B13/B14
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


#### Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Recommended Charge Rate	✓
Performance Marking	4A
	W4-C2-V3-E1

#### Terminal Type

##### T1


Standard DIN Post

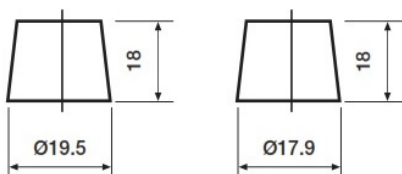

Positive Terminal


Negative Terminal

#### Cell Assembly Layout

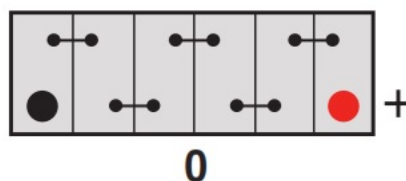

#### Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

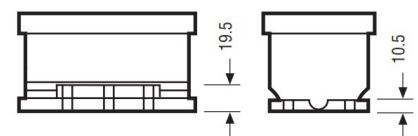

Data Sheet generated on 29/06/2023 - E&OE