



Yuasa Technisches Datenblatt

Yuasa YBX1063 - YBX1000 CaCa Batterien

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Leistung

Spannung 12V
Kapazität 20 Std (vorgegeben) 40Ah
Kaltstartstrom (A) EN1 360A

Abmessungen

Länge 207mm
Breite 175mm
Höhe 175mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure 11.4kg
Säurevolumen 3 Liter



Gehäuseeigenschaften

Gehäusotyp LB1 DIN
Batteriehalter B13/B14
Ladezustandsanzeige ✓
Tragegriffe ✓
Entgasung ✓
Deckeltyp Zentralentgasung


Technologie

Flammschutz ✓
Technologie Ca/Ca
Adskiller PE
Empfohlener Ladestrom 2A
Performance Marking W3-C2-V2-E1

Anschlusspol Typ

T1


Standard DIN Post

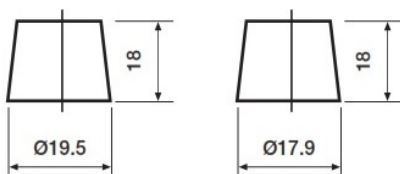

Positive Terminal

Negative Terminal


Zellenanordnung

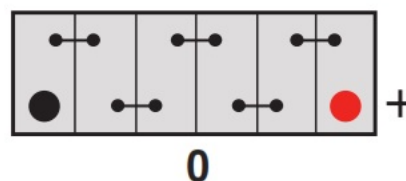

0

Batteriehalter

B3/B4 (B3 with Hold-Down adaptor)

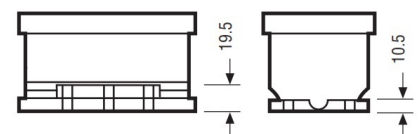

Datenblatt erstellt am 05/01/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX1063 - YBX1000 CaCa Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	40Ah
Cold Cranking Amps (EN1)	360A

Dimensions

Length	207mm
Width	175mm
Height	175mm

Weights & Measures

Mean Weight with Acid	11.4kg
Acid Volume	3 litres



Container Features

Case Type	LB1 DIN
Hold Down	B13/B14
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	Central Venting

Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
Recommended Charge Rate	2A
Performance Marking	W3-C2-V2-E1

Terminal Type

T1


Standard DIN Post



Positive Terminal


Negative Terminal

Cell Assembly Layout

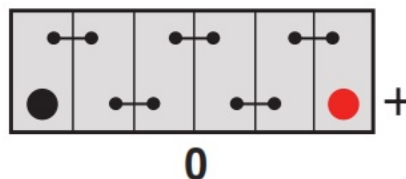

Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

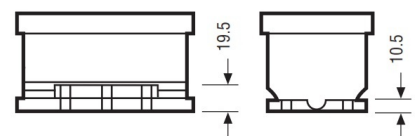

Data Sheet generated on 05/01/2024 - E&OE