

TH12-18





SERIES

Characterist	ics	
Electrical		
Nominal voltage		12.8V
Nominal capacity at 5 hours rate (25°C)		18Ah
Energy		230Wh
Charge Efficiency at 0.2C (25°C)		99.5%
Discharge Efficiency at 1C (25°C)		96-99%
Approx. internal resistance (25°C)		≤150.0 mΩ
Cycle life / 0.2C 100% D.O.D		>3000 cycles
Capacity affected by temperature	40°C	101%
	25°C	100%
	0°C	90%
	-10°C	75%
Mechanical		
Dimensions	Length	151±1.5mm (5.94inch)
	Width	99±1mm (3.89inch)
	Height	93±1mm (3.66inch)
	Total height	94±1mm (3.70inch)
Terminal type		Custom
Torque		3.0±0.6N.m
Weight		2.09kg (2.98lbs)±4%
Water & Dust resistance		IP65
Battery container ABS UL94-HB		V-0 optional
Cell strings		4 strings
Temperature		
Nominal operatir	ng temperature	25°C±3 (77±5°F)
Operating temperature range	Discharge	-20°C~60°C (-4°F~140°F)
	Charge	0°C~45°C (32°F~113°F)
	Storage	0°C~40°C (32°F~104°F)
Charging		,
Charging voltage at 25°C		14.6V
Standard charge mode (25°C±2°C, <75%RH)		0.2CA Constant Current to 14.6V, then Constant Volt- age 14.6V until the current drops to 0.02CA. Rest 30 minutes, before use.
Nominal charging current		3.6A
Maximum charging current		9A
Charging cut-off voltage		14.6V
Discharging		
Continuous discharge current		20A
Maximum pulse discharge current (<100ms)		60A
Discharge cut-off voltage		11.2V
Self discharge rate (25°C)		≤3%/month
Comunication	& connection	
Communication protocol (optional)		N/A
SOC (optional)		Bluetooth
Maximum modules in paralel or series		4 in string, 6 in parallel

Overview

Lithium-Iron Phosphate batteries offer superb improvement in characteristics compared to lead-acid technology. Due to the extreme cycle and calendar life, LiFePO4 batteries are an excellent long-term investment for your applications. Powerful, lightweight, safe, and smart, the Lithium-Iron Phosphate batteries are the future of the energy storage you can have right now.

Features

Longer cycle life - Up to 15 times longer cycle life and 5 times longer float/calendar life than lead-acid batteries.

More capacity - Provides up to 100% of usable energy.

Lightweight - 60% lighter than lead-acid batteries.


High discharge rate - Ability to fully discharge the battery at a high rate of discharge.

Fast charging - Charges much faster than conventional sealed lead-acid batteries.

Long cycle life - More than 3000 cycles at 100% depth of discharge.


Intelligent BMS - The battery management system monitors and adapts to battery conditions to maximize performance and safety.

Dimensions & Terminal Type (mm)

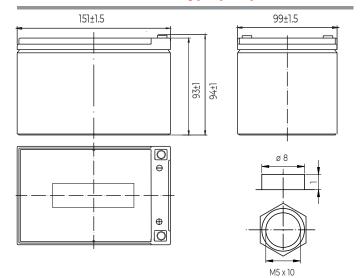





Discharge characteristics (25°C)




Temperature effects on discharge (0.5C)




Charging Time on S.O.C. (25°C)

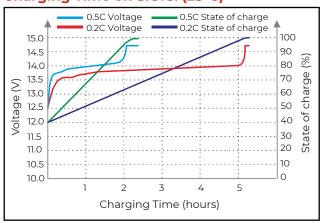


Charge characteristics (25°C)



Cycle life on D.O.D. (25°C)

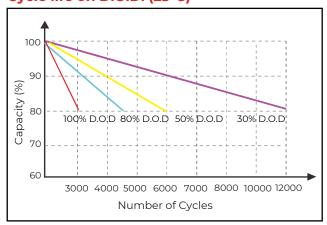

Self discharge characteristics



D.O.D. - depth of discharge S.O.C. - state of charge